


F0140
PRODUCT INFO

| Model name | F0140/NDN | F0140/NDH | F0140/FDN | F0140/FDH |
|---------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| EE article nr. | 816006/00 | 816006/02 | 8160006/01 | 816006/03 |
| Gross capacity (lt) | 140 | 140 | 140 | 140 |
| Temperature range (°C) | > -10°C | +30°C to -10°C | > -21°C | +30°C to -21°C |
| Automatic cooling/heating | no | yes | no | yes |
| Voltage | 12-24Vdc | 12-24Vdc | 12-24Vdc | 12-24Vdc |
| Peak Amps (@12Vdc) | 10 | 10 | 18 | 18 |
| Fuse on DC cord | 30A | 30A | 50A | 50A |
| External dimensions (mm) | 1000 x 620 x 710 | 1000 x 620 x 710 | 1000 x 620 x 710 | 1000 x 620 x 710 |
| Weight (kg) | 52 | 54 | 55 | 57 |
| PU insulation (mm) | 80-100 | 80-100 | 80-100 | 80-100 |
| "K" insulation factor | 0,35 W/m ² K | 0,35 W/m ² K | 0,35 W/m ² K | 0,35 W/m ² K |
| Compressor (model) | BD50F | BD50F | BD80F | BD80F |
| Refrigerant gas (type) | R134a | R134a | R134a | R134a |
| Refrigerant gas (gr) | 65 | 65 | 120 | 120 |
| Cut-out / cut-in voltage | 9,6Vdc-10,9Vdc | 9,6Vdc-10,9Vdc | 9,6Vdc-10,9Vdc | 9,6Vdc-10,9Vdc |
| AC/DC power supply (opt) | 560019/00 | 560019/00 | 560020/00 | 560020/00 |
| AC/DC power supply input | 100-240Vac 50/60 Hz | 100-240Vac 50/60 Hz | 100-240Vac 50/60 Hz | 100-240Vac 50/60 Hz |

*with ambient temperature +30°C

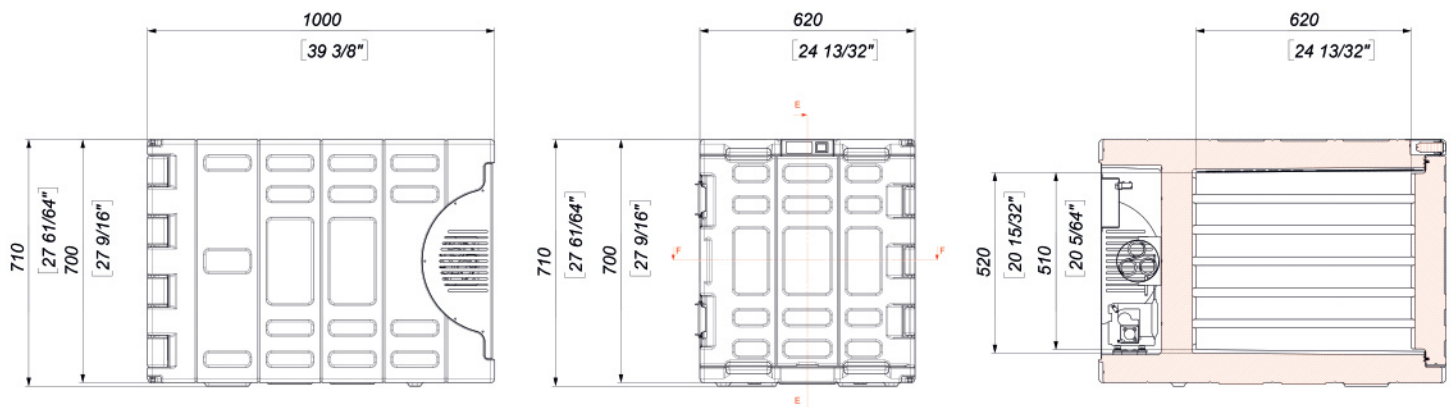

easy cooling, smart moving

www.coldtainer.com

The COLDTAINER product line includes a large range of state of the art 12V active mobile refrigerated containers. The containers are produced using the rotational molding technology according to the highest standards. They come in a variety of types, internal volumes and internal temperature ranges designed to satisfy all possible demands of professional users in term of temperature controlled transport