
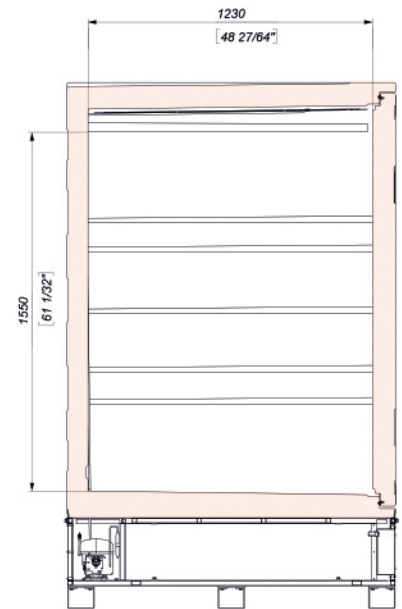
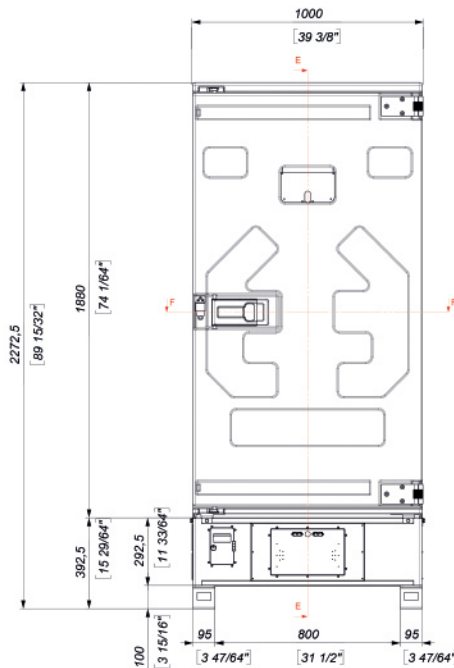


F1640 PRODUCT INFO

Model name	F1640/NDN	F1640/NDH
EE article nr.	816010/00	816010/01
Gross volume (Liters)	1640	1640
Temperature range (°C)	+0 °C	+30 °C a +0 °C
Automatic cooling/heating	NO	SI
Voltage	12 Vdc	12 Vdc
Peak Amps (@12Vdc)	32A	32A
External dimensions (mm)	1000x1430x2175	1000x1430x2175
Weight (kg)	263	267,5
PU insulation (mm)	85-90-105	85-90-105
"K" insulation factor	0,363W/m²K	0,363W/m²K
Compressor (model)	BD220 CL	BD220 CL
Refrigerant gas (type)	R404a	R404a
Refrigerant gas (grams)	0,25	0,25
Cut-out / cut-in voltage	11Vdc-12,3Vdc	11Vdc-12,3Vdc
Optional AC/DC power supply	560021/00	560021/00
AC/DC power supply input	100-240Vac 50-60 Hz	100-240Vac 50-60 Hz

*with ambient temperature +30°C

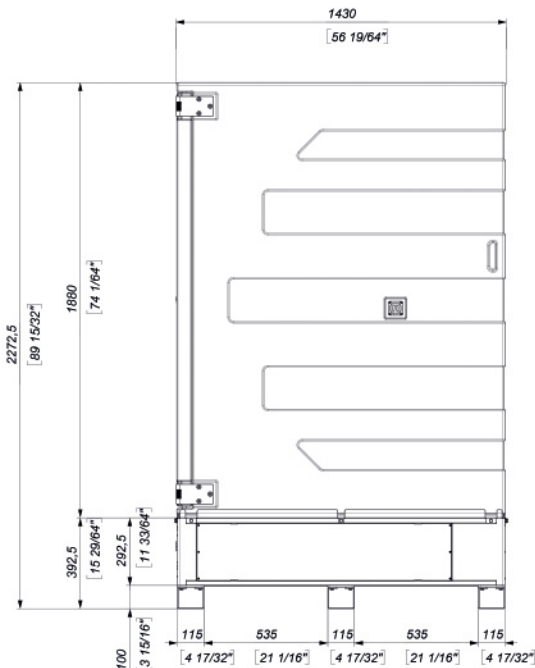

easy cooling, smart moving

www.coldtainer.com