


F0330 PRODUCT INFO

Model name	F0330/NDN	F0330/NDH	F0330/FDN	F0330/FDH	F0330/XFDN
EE article nr.	816008/00	816008/02	816008/01	816008/03	816008/04
Gross volume (Liters)	330	330	330	330	330
Temperature range (°C)*	> +0°C	+30°C to +0°C	> -21°C	+30°C to -21°C	> -30°C
Automatic cooling/heating	no	yes	no	yes	no
Voltage	12-24Vdc	12-24Vdc	12-24Vdc	12-24Vdc	12Vdc
Peak Amps (@12Vdc)	10	10	18	18	25
Fuse on DC cord	30A	30A	30A	30A	50A
External dimensions (mm)	1020 x 1000 x 1000	1020 x 1000 x 1000	1020 x 1000 x 1000	1020 x 1000 x 1000	1020 x 1000 x 1000
Weight (kg)	80	83	83	86	90
PU insulation (mm)	100	100	100	100	100
"K" insulation factor	0,27 W/m²K	0,27 W/m²K	0,27 W/m²K	0,27 W/m²K	0,27 W/m²K
Compressor (model)	BD50F	BD50F	BD80F	BD80F	BD220CL
Refrigerant gas (type)	R134a	R134a	R134a	R134a	R404a
Refrigerant gas (grams)	96	96	130	130	250
Battery cut-out/cut-in	9,6Vdc-10,9Vdc	9,6Vdc-10,9Vdc	9,6Vdc-10,9Vdc	9,6Vdc-10,9Vdc	11Vdc-12,3Vdc
Optional AC/DC power supply	560019/00	560019/00	560020/00	560020/00	560020/00
AC/DC power supply input	100-240Vac 50-60 Hz	100-240Vac 50-60 Hz	100-240Vac 50-60 Hz	100-240Vac 50-60 Hz	100-240Vac 50-60 Hz

*with ambient temperature +30°C

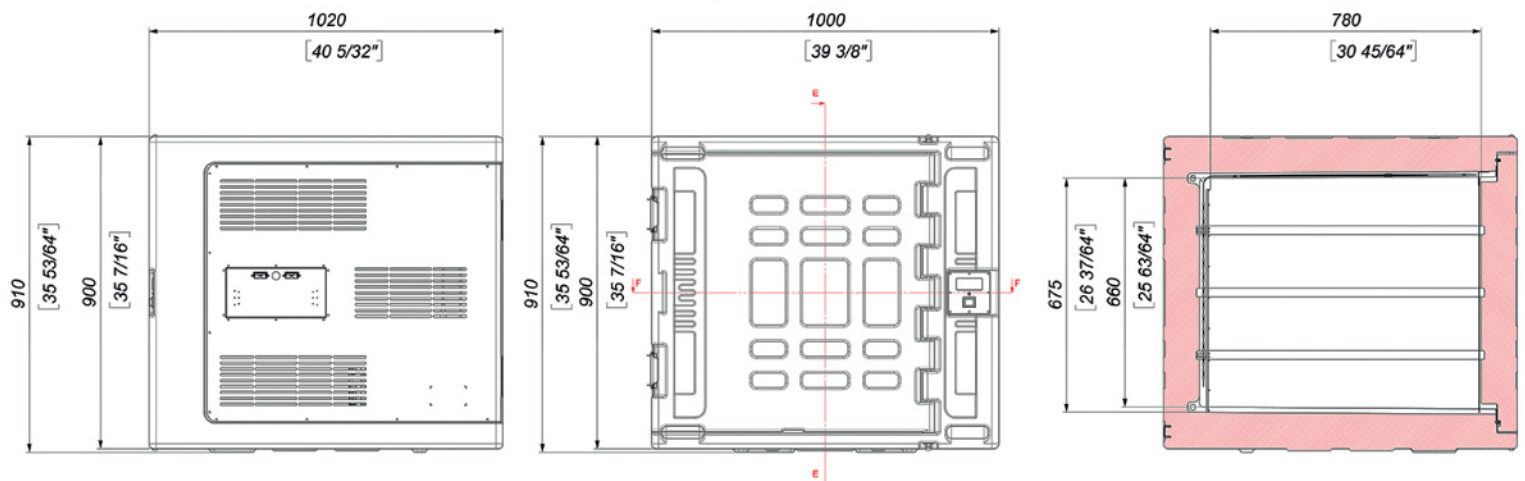

easy cooling, smart moving

www.coldtainer.com

The COLDTAINER product line includes a large range of state of the art 12V active mobile refrigerated containers. The containers are produced using the rotational molding technology according to the highest standards. They come in a variety of types, internal volumes and internal temperature ranges designed to satisfy all possible demands of professional users in term of temperature controlled transport