


F0440
PRODUCT INFO

Model name	F0440/NDN	F0440/NDH	F0440/FDN
EE article nr.	816018/00	816018/01	816018/02
Gross volume (Liters)	440	440	440
Temperature range (°C)	+0 °C	+30 °C a +0 °C	-21 °C
Automatic cooling/heating	NO	SI	NO
Voltage	12-24 Vdc	12-24 Vdc	12 Vdc
Peak Amps (@12Vdc)	18A	18A	25A
External dimensions (mm)	800x780x1775	800x780x1775	800x780x1775
Weight (kg)	140	143,5	146
PU insulation (mm)	85-90-105	85-90-105	85-90-105
"K" insulation factor	0,395W/m²K	0,395W/m²K	0,372W/m²K
Compressor (model)	BD80 F	BD80 F	BD220 CL
Refrigerant gas (type)	R134a	R134a	R404a
Refrigerant gas (grams)	0,135	0,135	0,25
Cut-out / cut-in voltage	9,6Vdc-10,9Vdc	9,6Vdc-10,9Vdc	11Vdc-12,3Vdc
Optional AC/DC power supply	560020/00	560020/00	560021/00
AC/DC power supply input	100-240Vac 50-60 Hz	100-240Vac 50-60 Hz	100-240Vac 50-60 Hz

*with ambient temperature +30°C

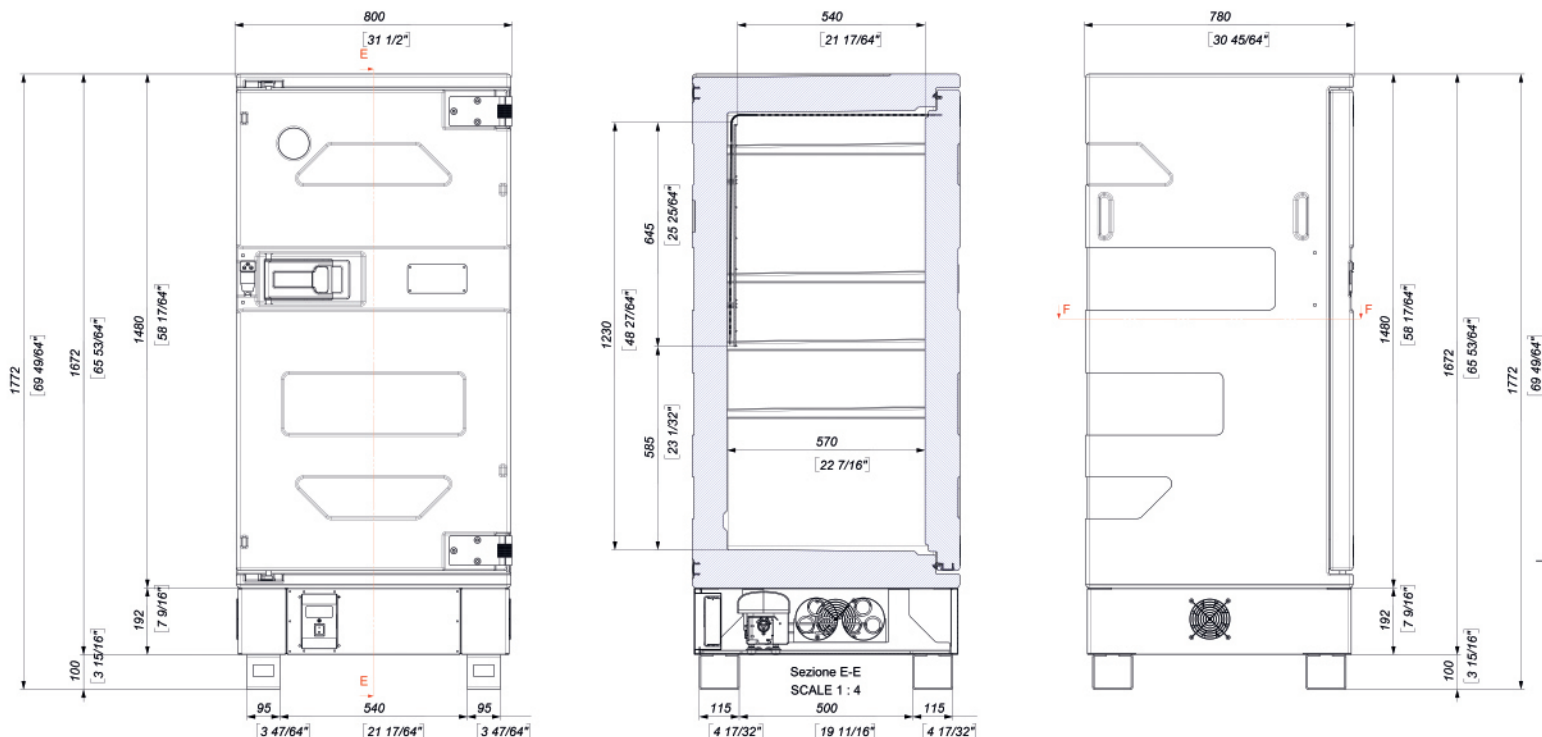

easy cooling, smart moving

www.coldtainer.com